


HELI

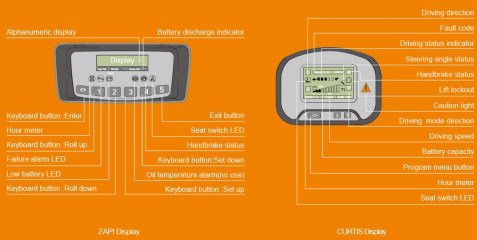

Standard configuration	Optional device	Attachments
Wide view standard mast	3-stage full free mast	Side shifter
Class III/III standard carriage	2-stage full free mast	Side shifting fork positioner
Load backrest	Wide carriage	Cargo boom
Control valve	Long forks	Lifting hook
Battery	Fork extension sleeve	Paper roll clamp
Standard seat	Solid tires	Bale clamp
Overhead guard	Wider tires	Multifunction clamp
Overhead guard rain cover	Warning light	Load stabilizer
Pneumatic tires	Rear working light	Push pulps
Traction pin	Tiltsupporting cylinder boot	Rotator
Driver's tool	Clab	Carton clamp
LED combination instrument	Suspension seat	
Head light	Customer color	
LED signal light	Coloring tires (white/green)	
Rear handle with horn	Automatic steering slow down device	

HELI 安徽合力股份有限公司
 ANHUI HELI CO., LTD.
 ADD: NO. 058 Fangxing Street, Economic Development Zone, Heli, P.R. China
 TEL: (86 55) 6363028, 6363028, 6363058, 63602105
 FAX: (86 55) 6363066
 WEBSITE: <http://www.helichina.net>

AUTHORIZED DEALER

2014 年 12 月 02 日
 Catalog No. 2014-07-A HELI-FH2



1-2.5 ton G SERIES AC ELECTRIC FORKLIFT TRUCK

G series / INTELLIGENT ENVIRONMENT-FRIENDLY

HELI
LIFTING THE FUTURE

TOP FORKLEIFT MANUFACTURER AND SALES IN CHINA FOR CONSECUTIVE 31 YEARS

G SERIES AC ELECTRIC FORKLIFT TRUCK 1-2.5 ton



Excellent Visibility

- Compact structure of mast and driver's view 6% improved.
- Sleering hand-wheel with 302mm diameter and right installation of meter effectively increase the front view.
- Large arc shape of the overhead guard and grid tray with proper angle increase operator's upward view.

Better Stability & More Safety

- New type drive axle and small front overhang design. Longitudinal Stability of the forklift increases by 4.5%.
- High installation of rear axle increasing transversal stability 2.1%.
- The space above driver's head is 50mm increased through increasing overhead guard's height and decreasing the seat's height.
- The space around the driver's foot and operating safety are increased through moving the tilting cylinder to be under the floor board.
- Multi speed selection function satisfies different working conditions and environment.
- Standard configuration of warning light and brake automatic warning function improve whole truck's safety.
- Battery side-pull function satisfies different customer's needs (optional).
- Automatic decelerating while steering improves safety (optional).
- Special side plate and top cover structure is easy for assembly and disassembly.



G series / INTELLIGENT ENVIRONMENT-FRIENDLY

High Performance & Energy Saving

- Lifting performance increases by 21%.
- Climbing and driving performance increase by 20% and 7%.
- The maximum turning radius is 2020mm, good performance of driving.
- The minimum turning radius is 1800mm(1-1.8t), 2000mm(2t) and 2020mm(2.5t) good performance of driving.
- Traveling saves more than 10% energy.
- LED signal light saves more than 80% energy.
- Battery cruising ability prolongs about 30 minutes.

Comfortable Operating & Lower Noise

- Comfortable operating is achieved through moving the steering unit up and 190mm increased operating space around driver's foot.
- Rear handle with horn function contributes to stable sitting pose when traveling backward and driving comfort and safety.
- Mast buffer, rear axle buffer and rear extension type valve operation knob increase operating comfort effectively.
- Ratchet type hand brake facilitates comfort driving.
- Big getting on and off handle fits different figure size.
- Ear noise reduces 1 db.

* Our products are subject to improvements and changes without notice.

