

CBD15/20-A/BH CBD15/20-A/BLIH 步行式电动托盘搬运车 Electric pallet truck

产品性能特点:

- 整车简洁、可靠、易操作，标配直立行走功能，适合在狭小空间作业；
- 整车经过充分强化验证，可靠耐用；
- 预留电磁制动解锁装置，保证车辆出现故障时能移走维修；
- 覆盖件采用内部固定方式，防止碰撞紧固螺栓，电池拆卸、维修方便；
- 标配内置充电器，随充随用，为客户使用提供便利；
- 全金属车身设计，全新PI造型，外观新颖，坚固耐用；
- 一体化手柄设计，锂电车型标配智能手柄，(实现故障显示、密码锁、小时计、CAN通讯等)操作简单舒适；
- 电池容量大，续航能力强；
- 锂电车型采用手提式锂电池包，电池更换轻松、便捷；
- 标配急停开关和紧急反向装置，确保安全使用；
- 具备断电刹车功能，手柄松开或压到底部，车辆立即断电刹车；
- 智能用电提醒，两级低电压保护，一级提醒，二级降速限起升；
- 整车宽配置，可选配货叉长度、货叉宽度等；
- 可选配平衡轮，提升车身稳定性；
- 可选配转弯限速，提升操作安全性。

Characteristics:

- The vehicle is simple and reliable, easy to operate. It is standard with upright walking function, suitable for narrow space operation.
- Full experimental verification of the vehicle, reliable and durable;
- Electromagnetic brake unlocking device reversed to ensure that vehicles can be removed in case of the vehicle fails.
- The covering parts are fixed internally to prevent collisions with fastening bolts. The battery is easily to remove and maintain;
- Standard the internal charger, convenient for customers to charge.
- All metal body design, new PI shape, novel appearance, reliable and durable;
- Integrated handle, the lithium type is equipped with a smart handle, (Display the fault code in real time, coded lock, hour meter, CAN etc.), operation is simple and comfortable;
- Large battery capacity, strong endurance;
- The lithium type uses a portable lithium battery package, the battery replacement is easy and convenient;
- Standard the emergency stop switch and emergency reverse device to ensure the safety of use;
- With the power-off automatic brake function, the handle is loosen or pressed to the bottom, and the vehicle immediately powered off and braked;
- Intelligent power reminder, two-level low voltage protection, one-level reminder, two-stage speed reduction limit lifting;
- The sufficient configuration of the vehicle, optional fork length, optional fork width, etc.
- Optional balance wheels to improve body stability;
- Optional turning speed limit to improve operational safety.





锂电池动力

CBD15/20-A/BH CBD15/20-A/BLIH

制造商和技术参数 Manufacturer's Data and Design Characteristics

		HELI			
特性	Characteristics				
1.01 制造商	Manufacturer	HELI			
1.02 型号	Model	CBD15	CBD20	CBD15	CBD20
1.03 配置号	Configuration number	A/BH	A/BH	A/BLIH	A/BLIH
1.04 操作方式	Type of operation	步行式 Pedestrian propelled	步行式 Pedestrian propelled	步行式 Pedestrian propelled	步行式 Pedestrian propelled
1.05 额定承载能力	Rated capacity	Q	kg	1500	2000
1.06 载荷中心距	Load center distance	c	mm	600	600
1.07 提升高度	Lift height	h3	mm	115	115
1.08 前悬距	Front overhang	x	mm	915	915
1.09 轴距	Wheelbase	y	mm	1256	1294
轮胎		Tyres			
2.01 轮胎类型	Tyre type	聚氨酯 Polyurethane			
2.02 轮胎尺寸, 驱动轮	Tyre size, driving wheels	φw	mm	φ210*75	φ210*75
2.03 轮胎尺寸, 承载轮	Tyre size, loading wheels	φw	mm	2*φ80*61	2*φ80*61
2.04 轮胎尺寸, 辅助轮	Tyre size, additional wheels	φw	mm	2*φ70*30 (选配Option)	2*φ70*30 (选配Option)
2.05 车轮数量, 前/后 (x=驱动轮)	Wheels, number front/rear (x=driven wheels)	1x/4 or 1x+2/4			
2.06 轮距, 承载端	track width, loading side	b11	mm	395 530	395 530
尺寸		Dimensions			
3.01 整车长度	Overall length	L1	mm	1662	1698
3.02 整车宽度	Overall width	b1	mm	562 697	562 697
3.03 货叉尺寸	Fork dimension	s/ef	mm	50*155*1150/1200	50*155*1150/1200
3.04 货叉外宽	Width of forks	b5	mm	550 685	550 685
3.05 货叉最低高度	Lowered height	h13	mm	80	80
3.06 轴距中心处离地间隙	Min. Ground clearance	m2	mm	30	30
3.07 操作位置手柄杆最小/最大高度	Height drawbar in driving position min./max	h34	mm	730/1182	730/1182
3.08 通道宽度: 1000x1200托盘 (1200跨货叉放置)	Aisle width with pallet 1000x1200 across forks	As	mm	2235	2273
3.09 通道宽度: 800x1200托盘 (1200沿货叉放置)	Aisle width with pallet 800x1200 along forks	Ast	mm	2122	2160
3.10 转弯半径	Min. Turning radius	Wa	mm	1430	1468
性能		Performance Data			
4.01 行驶速度 (满载/空载)	Travel speed (laden/unladen)	km/h		4/4.5	4.5/5
4.02 起升速度 (满载/空载)	Lift speed (laden/unladen)	mm/s		28/40	20/37
4.03 下降速度 (满载/空载)	Lowering speed (laden/unladen)	mm/s		60/40	50/40
4.04 最大爬坡能力 (满载/空载)	Max. gradeability (laden/unladen)	%		6/16	6/16
4.05 制动类型	Service brake type	电磁制动 Electromagnetic brake			
电池和充电器		Battery			
5.01 蓄电池电压/容量	Battery voltage/rated capacity	v/Wh		24V/65/85Ah	48V/ (30/42Ah)
5.02 蓄电池重量 (±5%)	Battery weight	kg		30	40
5.03 充电器规格	Charger specification			24V/10Ah	48V/5Ah
电机和控制器		Motor and controller			
6.01 驱动电机功率 (S2-60min)	Driving motor powering (S2-60min)	kW		0.75	1
6.02 起升电机功率 (S3-15%)	Lifting motor powering (S3-15%)	kW		0.8	0.8
6.03 控制器	Controller	嘉晨 前拓			
重量		Weight			
7.01 总重 (含电池)	Total weight (with battery)	kg		195/210	205/220
7.02 桥负载 (满载, 驱动轮/承载轮)	Axle load (laden, front/rear)	kg		511/1184 521/1188	631/1574 642/1578
7.03 桥负载 (空载, 前/后)	Axle load (unladen, front/rear)	kg		134/61 143/67	143/62 153/67
其他		Addition data			
8.01 驱动控制类型	Type of drive control	直流速度控制 DC			
8.02 驾驶员耳边噪音水平	Sound pressure level at the driver's ear	dB(A)		≤69	≤69
8.03 转向类型	Steering type	机械转向 Manual steering			

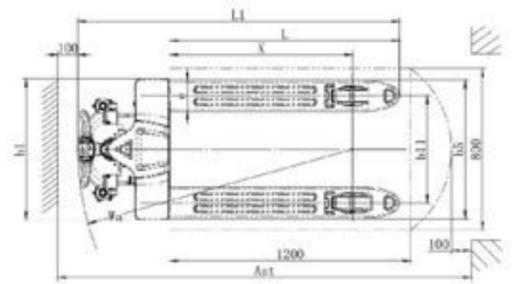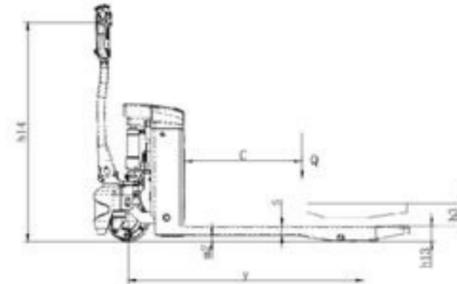

安徽合力股份有限公司
ANHUI HELI CO., LTD.
地址 / 中国 合肥方兴大道668号
Add / No.668, FangXing Road, Hefei, China
邮编 (Post Code) / 230000

客服热线 (Customer Service Hotline) / 4001-600761
服务电话 (Service Tel) / +86-551-63689000, 63648005

* 本公司保留更改产品设计和规格的权利，恕不另行通知。
* Our products are subject to improvements and changes without notice.